


## 06 Downlights Fixed LED>The 48W Square Panels Aluminium

### 50148F/W/C

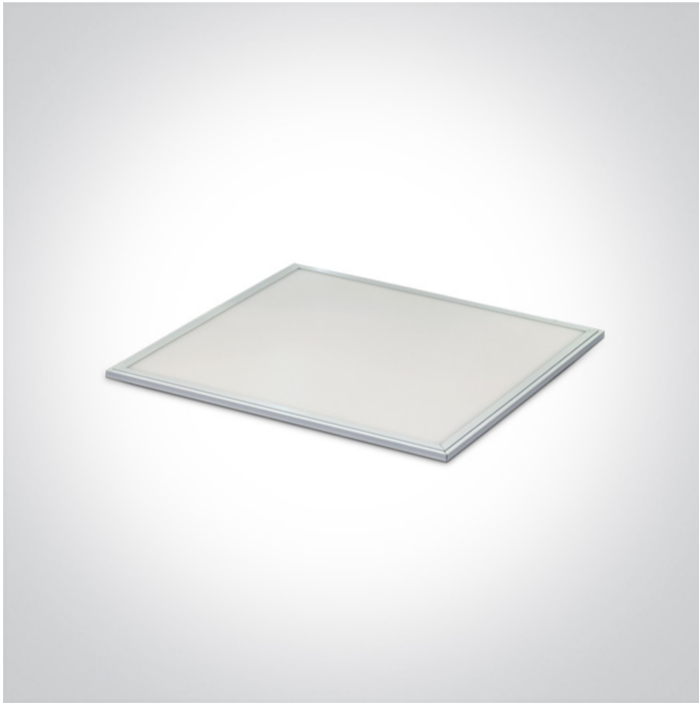

60x60 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications.

Complete with dimmable driver.


Complies with standard EN60598-1 and any other specific standards.



#### Downloads



#### Dimensions



#### Gallery



#### Related items



89050L



89050TLD

#### Physical Specification

Item Group



06 Downlights Fixed LED

Family

The 48W Square Panels Aluminium

Order Code	50148F/W/C
Colour	White
Material	Aluminium
Diffuser Material	Acrylic
Shape	Rectangular
Length	595mm
Width	595mm
Height	20mm
Recessed T-Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	48W
IP Rating	IP20
Light Source	LED built in
Dimmable	Yes
Dimmer type	Triac
F Mark	


## Fitting

Input Type	Constant Current
Input Current	1200mA



Safety Class	III
Power(Watts)	48W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar

## Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	32,4-50,4W
Power Factor	0.9
Constant Current	Yes
1200mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	Yes
Housing Material	Plastic
Brand	Lifud

## Illumination Data

Colour Temperature	4000K
Lumen Output	3800lm
Light Efficiency	79,167lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

## Packing Info

Pcs/Carton

2

Pobrano z mamadecor.pl


Barcode

5291889034889

HS Code

9405109890

## Energy Label

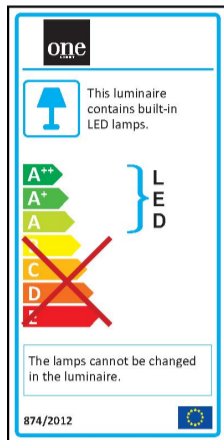

## Certification & Warranty

Warranty

2 Years

Average Lifetime

30000 hours

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

