


Product Datasheet

www.1-light.eu

07 Downlights Adjustable LED>The COB Square Downlights Die cast

51109B/W/W

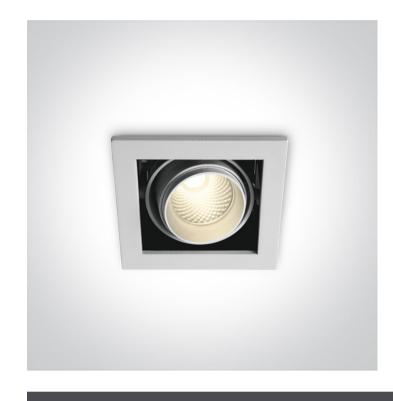

10W COB LED Recessed adjustable downlight, COB square range, IP20.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions



Gallery



Physical Specification

Item Group	07 Downlights Adjustable LED
Family	The COB Square Downlights Die cast
Order Code	51109B/W/W
Colour	White
Material	Die Cast
Shape	Rectangular
Length	107mm

Width	107mm	Pobrano z mamadecor.pl
Height	98mm	
Cutout Hole Width	90mm	
Cutout Hole Length	90mm	
Recessed Ceiling	Yes	
Depth Required	120mm	
Indoor	Yes	
Adjustable	2 Directions	
Electrical Characteristics		
Coor	Cutomost Instituted	
Gear	External-Included	
Fitting + Driver		
	000 0401/	
Input Voltage	220-240V	
50 Hz	Yes	
60 Hz	Yes	
Safety Class	4.0\\\	
Power(Watts)	10W	
IP Rating	IP20	
Light Source	LED built in	
F Mark		
Fitting		
Input Type	Constant Current	
Input Current	200mA	
Voltage	37,3V	
Safety Class	√III >	
Power(Watts)	7,46W	
IP Rating	IP20	
Light Source	LED built in	
LED Type	COB	

Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	5,5-8,4W
Power Factor	0,9
Constant Current	Yes
200mA	27-42V
IP Rating	IP20
Safety Class	
Housing Material	Plastic
Illumination Data	
Illumination Data	
Illumination Data Colour Temperature	3000K
	3000K 700lm
Colour Temperature	
Colour Temperature Lumen Output	700lm
Colour Temperature Lumen Output Light Efficiency	700lm 70lm/VV
Colour Temperature Lumen Output Light Efficiency CRI	700lm 70lm/VV 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	700lm 70lm/VV 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	700lm 70lm/VV 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	700lm 70lm/VV 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	700lm 70lm/VV 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	700lm 70lm/W 80 36°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Weight	700lm 70lm/W 80 36° 0,57kg

Warranty	3 Years
Weee Directive	Yes



