


# **Product Datasheet**

www.1-light.eu

## 10 Track Spots>The Track Floodlight Range

# 65020T/W/W

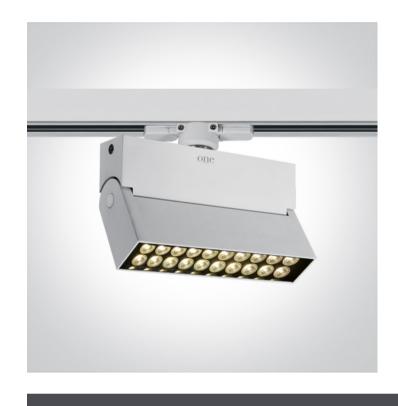

LED Linear track light, high lumen output ideal for shops and showrooms.

Complete with driver.

Complies with standard EN60598-1 and any other specific standards.





Downloads










Dimensions



#### Related items



40003A/W

#### **Physical Specification**

| Item Group | 10 Track Spots             |
|------------|----------------------------|
| Family     | The Track Floodlight Range |
| Order Code | 65020T/W/W                 |
| Colour     | White                      |
| Material   | Die Cast                   |
| Shape      | Rectangular                |
| Length     | 170mm                      |

| Width         | 35mm Pobrano z mamadecor.pl |
|---------------|-----------------------------|
| Height        | 105mm                       |
| Track mounted | Yes                         |
| Indoor        | Yes                         |
| Adjustable    | 2 Directions                |
|               |                             |

# **Electrical Characteristics** Gear Built In Fitting + Driver Input Voltage 220-240V 50 Hz Yes 60 Hz Yes Safety Class Power(Watts) 20W IP Rating IP20 Light Source LED built in Dimmable No Fitting Input Type **Constant Current** Input Current 600mA Voltage 30V Power(Watts) 20W IP Rating IP20 Light Source LED built in

| LED Brand  | Lumileds |
|------------|----------|
| LED Number | 20       |
|            |          |
| Gear       |          |
|            |          |

SMD 3030


LED Type

| Gear Type   | Led Driver               | Pobrano z mamadecor.pl |
|---|--------------------------|------------------------|
| Input Voltage   | 220-240V                 |                        |
| 50 Hz   | Yes                      |                        |
| 60 Hz   | Yes                      |                        |
| Power(Watts)  | 16,2-25,2W               |                        |
| Power Factor  | 0,9                      |                        |
| Constant Current  | Yes                      |                        |
| 600mA   | 27-42V                   |                        |
| IP Rating   | IP20                     |                        |
| Safety Class  |                          |                        |
| Dimmable  | No                       |                        |
| Housing Material  | Plastic                  |                        |
| Output Terminal   | Connector                |                        |
| Manufacturer  | Lifud                    |                        |
| Protection  | Short Circuit Protection |                        |
| Illumination Data   |                          |                        |
| Colour Temperature  | 3000K                    |                        |
| Lumen Output  | 1400lm                   |                        |
| Light Efficiency  |                          |                        |
|   | 70lm/W                   |                        |
| CRI   | 70lm/W<br>80             |                        |
| CRI Beam Angle  |                          |                        |
|   | 80                       |                        |
| Beam Angle  | 80<br>24°                |                        |
| Beam Angle  | 80<br>24°                |                        |
| Beam Angle  Illumination Diagram  Packing Info                                    | 80<br>24°                |                        |
| Beam Angle  Illumination Diagram  Packing Info  Box Length                        | 80<br>24°                |                        |
| Beam Angle  Illumination Diagram  Packing Info  Box Length  Box Width             | 80<br>24°<br>18cm        |                        |
| Beam Angle  Illumination Diagram  Packing Info  Box Length  Box Width  Box Height | 80 24°  18cm 16cm 4.5cm  |                        |
| Beam Angle  Illumination Diagram  Packing Info  Box Length  Box Width             | 80<br>24°<br>18cm        |                        |

HS Code

9405409900

## Energy Label



### Certification & Warranty

Warranty 2 Years

Weee Directive Yes

switch to one light!

