


Product Datasheet

www.1-light.eu

09 Track Lights>The COB Track Spot Range Aluminium

65611NT/B/C

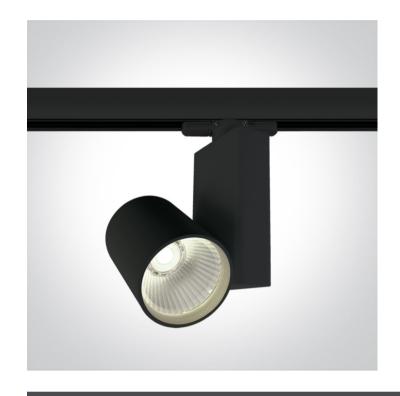

15W track spot with COB LED, ideal for shops and showrooms.

Complete with driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads









Dimensions



Related items





40002A/B

40003A/B

Physical Specification

Item Group	09 Track Lights
Family	The COB Track Spot Range Aluminium
Order Code	65611NT/B/C
Colour	Black
Material	Aluminium
Shape	Circular
Height	110mm

Diameter	80mm Pobrano z mamadecor.pl
Track mounted	Yes
Indoor	Yes
Adjustable	2 Directions
Electrical Characteristics	
0	D. 201
Gear	Built In
Fitting + Driver	
	220-240V
Input Voltage 50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
Fitting	
Input Type	Constant Current
Input Current	400mA
Voltage	36V
Safety Class	
Power(Watts)	14,4W
IP Rating	IP20
Light Source	LED built in
LED Type	СОВ
LED Brand	Sanan

Led Driver

Gear

Gear Type

Input Voltage	220-240V	Pobrano z mamadecor.pl
50 Hz	Yes	
60 Hz	Yes	
Power(Watts)	10-16W	
Power Factor	0,9	
Constant Current	Yes	
400mA	25-40V	
IP Rating	IP20	
Safety Class		
Dimmable	No	
Housing Material	Plastic	
Output Terminal	Connector	
Brand	Lifud	
Protection	Short Circuit Protection	
Ilumination Data		
	4000K	
Colour Temperature	4000K 1300lm	
Colour Temperature Lumen Output	1300lm	
Colour Temperature Lumen Output Light Efficiency	1300lm 86,67lm/W	
Colour Temperature Lumen Output Light Efficiency CRI	1300lm 86,67lm/W 80	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	1300lm 86,67lm/W	
Colour Temperature Lumen Output Light Efficiency CRI	1300lm 86,67lm/W 80	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1300lm 86,67lm/W 80	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	1300lm 86,67lm/W 80	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1300lm 86,67lm/W 80	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1300lm 86,67lm/W 80 38°	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length	1300lm 86,67lm/W 80 38°	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width	1300lm 86,67lm/W 80 38° 25cm 13cm	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height	1300lm 86,67lm/W 80 38° 25cm 13cm 10cm	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height Pcs/Carton	1300lm 86,67lm/W 80 38° 25cm 13cm 10cm	

Warranty	3 Years
Weee Directive	Yes



