

## 14 Plafo&gt;LED Aluminium Panel Range

## 62140RE/W/C



40W, 120x30cm LED slim plafo light, IP40, suitable for residential and commercial application.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



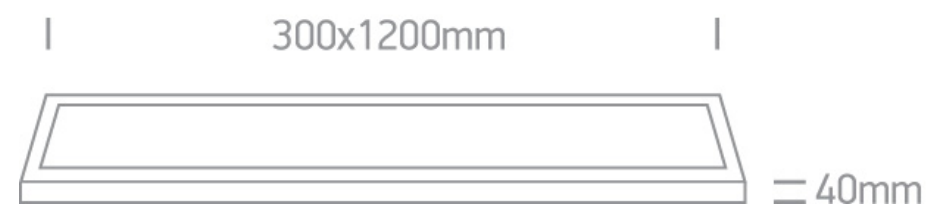

## Dimensions





## Physical Specification


Item Group	14 Plafo
Family	LED Aluminium Panel Range
Order Code	62140RE/W/C
Colour	White
Material	Aluminium
Shape	Rectangular
Length	1200mm
Width	300mm
Height	42mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

## Electrical Characteristics


Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP40
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1000mA
Voltage	38V
Safety Class	
Power(Watts)	38W
IP Rating	IP40
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan
F Mark	

Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes

Power(Watts)	28,5-38W
Power Factor	0,9
Constant Current	Yes
1000mA	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	40°C
Operating Temp	80°C
Housing Material	Plastic
Output Terminal	Cable
Fast Connector	Yes
Fast Connector Type	Other
Brand	AGT

#### Illumination Data

Colour Temperature	4000K
Lumen Output	3600lm
Light Efficiency	90lm/W
CRI	80
Illumination Diagram	

#### Packing Info

Box Length	133cm
Box Width	36cm
Box Height	8,5cm
Box Weight	2.820kg
Pcs/Carton	4
Barcode	5291889052166
HS Code	9405413990

Warranty

3 years

switch to  
**one light!**

one  
LIGHT

