


## **Product Datasheet**

www.1-light.eu

## 14 Plafo>The LED Plafo Outdoor Square Plastic

## 67282AN/W/W

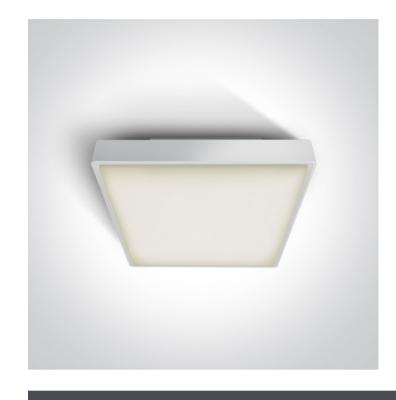

24W LED plafo light, IP65, ideal for both indoor and outdoor installation.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.











Downloads










Dimensions



## **Physical Specification**

Item Group	14 Plafo
Family	The LED Plafo Outdoor Square Plastic
Order Code	67282AN/W/W
Colour	White
Material	Plastic
Diffuser Material	PC
Shape	Rectangular
Length	295mm
Width	295mm
Height	80mm
Surface Ceiling	Yes
Indoor	Yes

Outdoor	Yes	Pobrano z mamadecor.pl
Adjustable	No	
IK Rating	8	
lectrical Characteristics		
Gear	Built In —————	
Fitting + Driver		
Input Voltage	220-240V	
50 Hz	Yes	
60 Hz	Yes	
Safety Class		
Power(Watts)	24W	
IP Rating	IP65	
Light Source	LED built in	
Dimmable	No	
F Mark	F	
Fitting		
Input Type	Constant Current	
Input Current	600mA	
Voltage	38V	
Power(Watts)	22,8W	
IP Rating	IP65	
Light Source	LED built in	
LED Type	SMD 2835	
LED Brand	Epistar	
F Mark	F	
Gear		
Gear Type	Led Driver	

Input Voltage	220-240V	Pobrano z mamadecor.pl
50 Hz	Yes	
60 Hz	Yes	
Power(Watts)	15,6-26W	
Power Factor	0,9	
Constant Current	Yes	
600mA	26-43,5V	
IP Rating	IP20	
Safety Class		
Dimmable	No	
Housing Material	Plastic	
Output Terminal	Connector	
Brand	Eaglerise	
Ilumination Data		
Colour Temperature	3000K	
Colour Temperature  Lumen Output	3000K 1440lm	
Lumen Output	1440lm	
Lumen Output Light Efficiency	1440lm 60lm/W	
Lumen Output Light Efficiency CRI	1440lm 60lm/W	
Lumen Output Light Efficiency CRI Illumination Diagram	1440lm 60lm/W	
Lumen Output Light Efficiency CRI Illumination Diagram	1440lm 60lm/W	
Lumen Output Light Efficiency CRI Illumination Diagram	1440lm 60lm/W	
Lumen Output  Light Efficiency  CRI  Illumination Diagram	1440lm 60lm/W 80	
Lumen Output  Light Efficiency  CRI  Illumination Diagram  Packing Info  Box Length	1440lm 60lm/W 80 30,5cm	
Lumen Output  Light Efficiency  CRI  Illumination Diagram  Packing Info  Box Length  Box Width	1440lm 60lm/W 80 30,5cm 30,5cm	
Lumen Output  Light Efficiency  CRI  Illumination Diagram  Packing Info  Box Length  Box Width  Box Height	1440lm 60lm/W 80 30,5cm 30,5cm 8,5cm	
Lumen Output  Light Efficiency  CRI  Illumination Diagram  Packing Info  Box Length  Box Width  Box Height  Box Weight	1440lm 60lm/W 80 30,5cm 30,5cm 8,5cm 1.390kg	
Lumen Output  Light Efficiency  CRI  Illumination Diagram  Packing Info  Box Length  Box Width  Box Height  Box Weight  Pcs/Carton	1440lm 60lm/W 80 30,5cm 30,5cm 8,5cm 1.390kg	

Warranty	2 Years
Weee Directive	Yes



