INSTALLATION MANUAL

67428

















2,2W | IP54 | Solar powered | Sensor | Die cast

Supplied with spike. 1x2200mAh lithium battery. 80 **CRI**

INSTALLATION WITH SPIKE

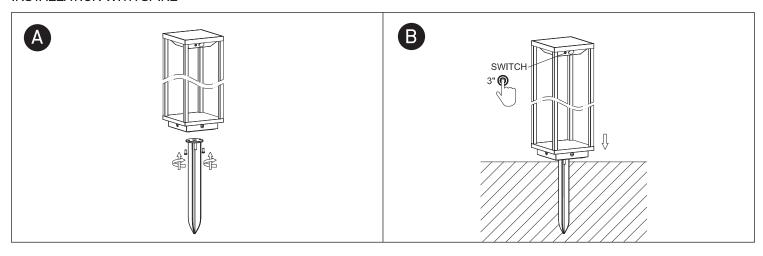

INSTALLATION ON CONCRETE

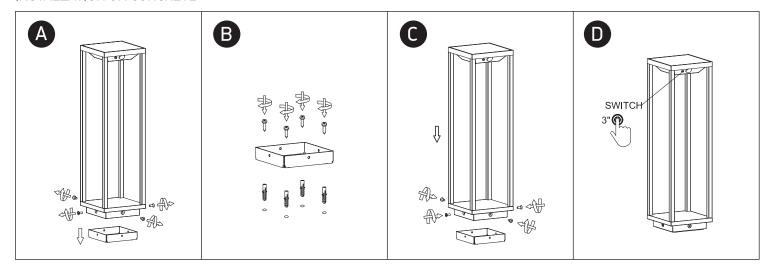

LED 100% when movement detected. LED 15% when no movement detected.

PIR Sensor: Distance up to 6m and within angle 120°

Charging time: 6-8Hrs (solar)

Working time: 2,5-3Hrs in 100% LED brightness 20-25Hrs in 15% LED brightness

Warnings:

- 1. Battery have the function of overcharge and discharge protection.
- 2. Please do not change anything of Solar panel or battery.
- 3. Please understand that the work time will be effected when sunshine is not enough (rainy ,cloudy or winter).
- 4. It needs to clean the surface of battery usually.

