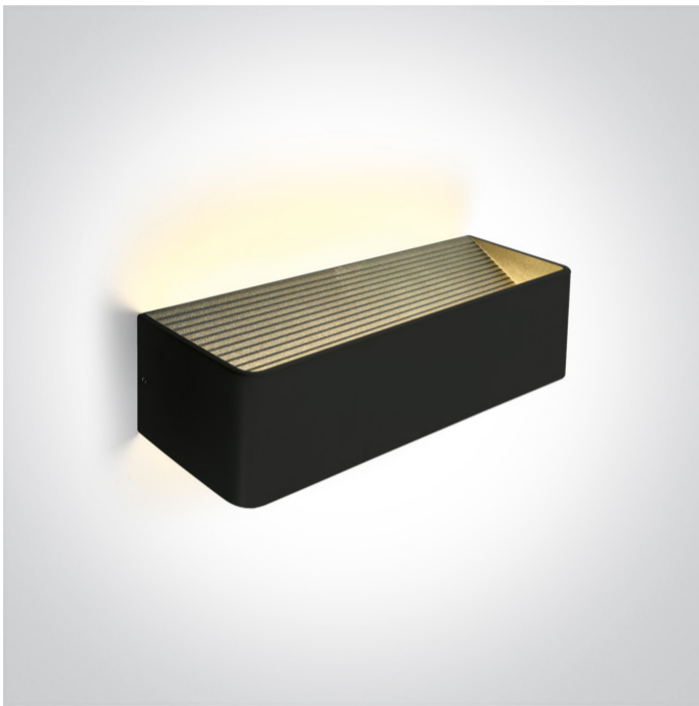# Product Datasheet

one LIGHT

13 Wall & Ceiling LED>The Backlight Wall Range Aluminium

67466C/B/W

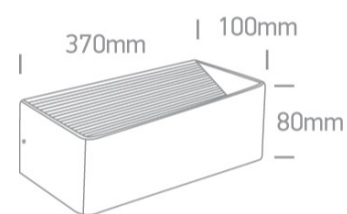12W LED wall surface light IP20.

Complete 300mA driver.

Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI CE

Downloads

Dimensions

370mm | 100mm
80mm

Physical Specification	
Item Group	13 Wall & Ceiling LED
Family	The Backlight Wall Range Aluminium
Order Code	67466C/B/W
Colour	Black
Material	Aluminium
Shape	Rectangular
Length	370mm
Width	100mm
Height	80mm
Surface Wall	Yes
Indoor	Yes
Adjustable	No

one LIGHT

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⏚
Power(Watts)	12W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	300mA
Voltage	38V
Safety Class	III
Power(Watts)	11,4W
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Edison
F Mark	F

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes

one
LIGHT

Power(Watts)	7,5-12,6W
Power Factor	0,5
Constant Current	Yes
300mA	25-42V
IP Rating	IP20
Safety Class	☐
Housing Material	Plastic
Brand	Eaglerise
Protection	0

Illumination Data

Colour Temperature	3000K
Lumen Output	800lm
Light Efficiency	66,67lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Weight	1.350kg
Pcs/Carton	12
Barcode	5291889062851
HS Code	9405409900

Certification & Warranty

Warranty	2 Years	
Weee Directive	Yes	

switch to
one light!

one
LIGHT