INSTALLATION MANUAL

67530A





























2,2W | IP65 | SMD 2835 | CCT adjustable | Touch switch | Dimmable | Die cast

Rechargeable USB socket. 1x4400mAh lithium battery 80 **CRI**

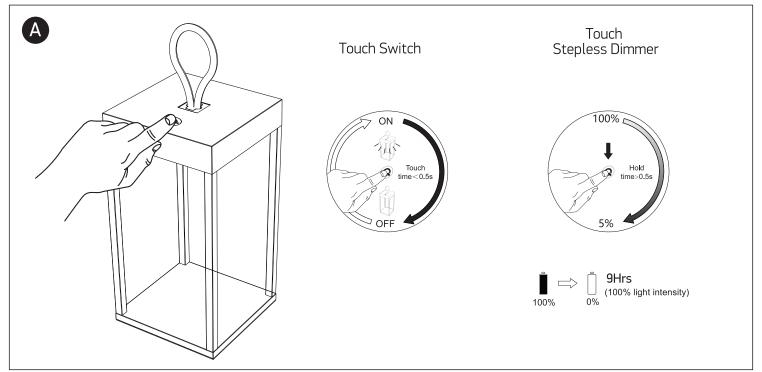

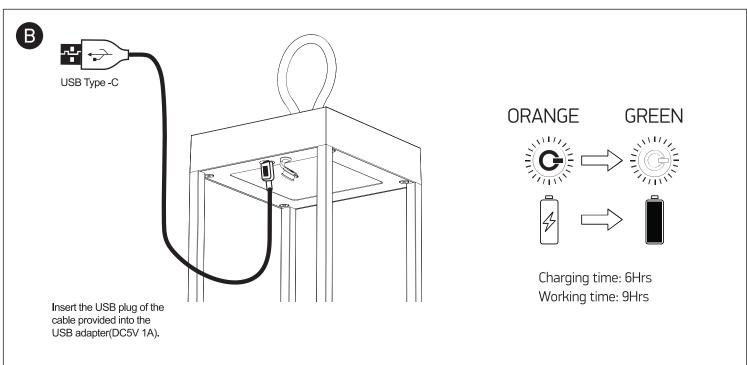

Warnings:

- 1. Do not cover the fitting.
- 2. The batteries should not be opened, destroyed or incinerate.
- 3. Do not short circuit terminals, or over charge the battery, forcedover-discharge, throw to fire.
- 4. Do not crush or puncture the battery, or immerse in liquids.

