

19 Wall Recessed &amp; Inground&gt;The Dark Light Inground Range

69056A/W



3W COB LED inground, IP67.

Requires 24V driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

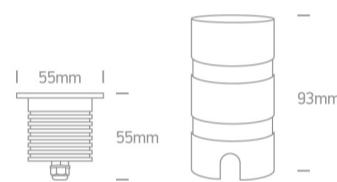

Must be ordered separately



89015V

## Physical Specification

Item Group

19 Wall Recessed & Inground

Family

The Dark Light Inground Range

Order Code

69056A/W

Colour

Aluminium

Material

Natural Aluminium



Diffuser Material

Glass

Shape	Circular
Height	55mm
Diameter	55mm
Cutout Hole Diameter	50mm
Inground	Yes
Depth Required	100mm + 300mm drainage
Indoor	Yes
Outdoor	Yes
IK Rating	8

## Electrical Characteristics

## Fitting

Input Type	Constant Voltage
Input Voltage	24V DC
Safety Class	
Power(Watts)	3W
IP Rating	IP67
Light Source	LED built in
LED Type	COB
LED Brand	Prolight
Cable Length	200cm
F Mark	

## Illumination Data

Colour Temperature	3000K
Lumen Output	240lm
Light Efficiency	80lm/W
CRI	80
Beam Angle	38°



Dark Light

Yes

## Packing Info

Pcs/Carton

50


Barcode

5291889064275

HS Code

9405409900

## Energy Label

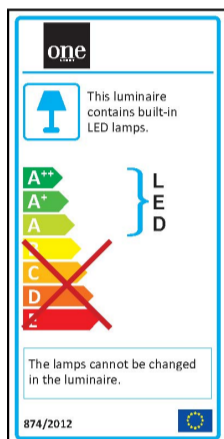

## Certification &amp; Warranty

Warranty

3 Years

Weee Directive

Yes

switch to  
**one light!**

