

21 Industrial & Floodlights>The LED Park Lantern Die cast

70110/AN/C



LED outdoor light for poles 3m and higher. Ideal for parks, parkings, playgrounds.

Supplied with non-dimmable driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery



Physical Specification

Item Group

21 Industrial & Floodlights

Family

The LED Park Lantern Die cast

Order Code

70110/AN/C

Colour

Anthracite

Material

Die Cast

Shape



Rectangular

Length

425mm


Width	425mm
Height	820mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics


Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	60W
IP Rating	IP66
Light Source	LED built in
Dimmable	No
Cable Length	100cm
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1700mA
Voltage	35V
Power(Watts)	59,5W
IP Rating	IP66
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Cree

Gear


Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	46-92W
Power Factor	0,9
Constant Current	Yes
1700mA	27-54V
IP Rating	IP65
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Meanwell

Illumination Data

Colour Temperature	4000K
Lumen Output	4500lm
Light Efficiency	75lm/W
CRI	70
Beam Angle	Assymetric
Illumination Diagram	

Packing Info

Box Weight	9,6Kg
Pcs/Carton	1
Barcode	5291889051688
HS Code	9405409900

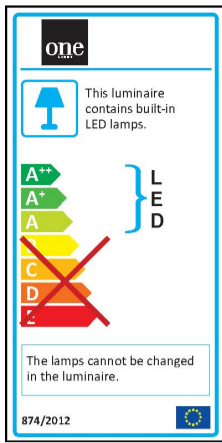

Certification & Warranty

Warranty

5 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

