

21 Industrial & Floodlights>The LED Park Light Die cast

70112/B/C



LED outdoor light for poles 3m and higher. Ideal for parks, parkings, playgrounds. Post Diameter 60mm.

Complete with 2400mA driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions



Gallery



Physical Specification

Item Group

21 Industrial & Floodlights

Family

The LED Park Light Die cast

Order Code

70112/B/C

Colour

Black

Material

Die Cast

Shape



Circular

Height

530mm


Diameter	450mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics


Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	75W
IP Rating	IP66
Light Source	LED built in
Dimmable	No
Cable Length	150cm
F Mark	

Fitting	
Input Type	Constant Current
Input Current	2400mA
Voltage	30V
Power(Watts)	72W
IP Rating	IP66
Light Source	LED built in
LED Brand	Seoul

Gear	
Gear Type	Led Driver

Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	52,8-134,4W
Power Factor	0,9
Constant Current	Yes
Output	2400mA
Voltage Range	22-56V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Sosen


Illumination Data

Colour Temperature	4000K
Lumen Output	9000lm
Light Efficiency	120lm/W
CRI	80
Illumination Diagram	

Packing Info

Pcs/Carton	1
Barcode	5291889068327
HS Code	9405409900

Energy Label

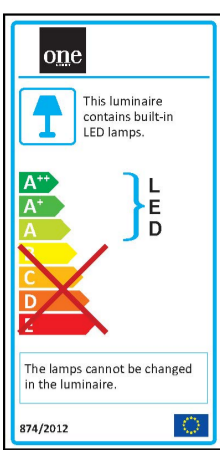

Certification & Warranty

Warranty

5 Years

Average Lifetime

50000hours

Weee Directive

Yes

switch to
one light!

one
LIGHT

