

21 Industrial &amp; Floodlights&gt;The LED Floodlights

7022/G/D



15x1W floodlight, IP65.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

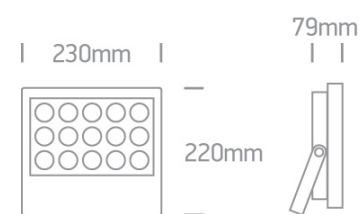

## Gallery



## Physical Specification

Item Group

21 Industrial &amp; Floodlights

Family

The LED Floodlights

Order Code

7022/G/D

Colour

Grey

Material

Die Cast

Shape



Rectangular

Length

230mm


Width	220mm
Height	79mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	1 Direction

## Electrical Characteristics


Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15x1W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
Cable Length	200cm
F Mark	

Fitting	
Input Type	Constant Current
Power(Watts)	15W
IP Rating	IP65

Gear	
Gear Type	Led Driver

Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	15W
Power Factor	0,5
Constant Current	Yes
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Eaglerise
Protection	Short Circuit


#### Illumination Data

Colour Temperature	6000K
Lumen Output	1125lm
Light Efficiency	75lm/W
Beam Angle	40°
Illumination Diagram	

#### Packing Info

Pcs/Carton	4
Barcode	5291889016977
HS Code	9405409900

#### Energy Label

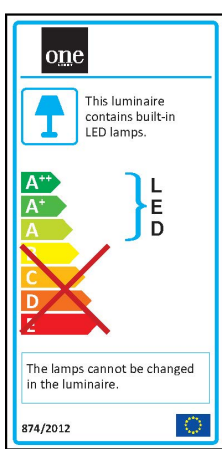

## Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

