

21 Industrial &amp; Floodlights&gt;The COB LED Slim Floodlights

7028A/AN/C



10W COB LED Slim floodlight, IP65.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

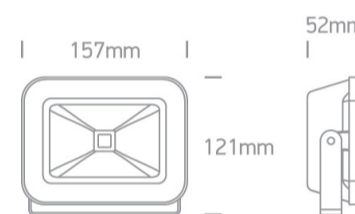

## Physical Specification

Item Group	21 Industrial & Floodlights
Family	The COB LED Slim Floodlights
Order Code	7028A/AN/C
Colour	Anthracite
Material	Die Cast
Shape	Rectangular
Length	157mm
Width	121mm
Height	52mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes

Outdoor

Yes

Pobrano z mamadecor.pl

Adjustable

1 Direction

## Electrical Characteristics

Gear

Built In

### Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

10W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

Cable Length

100cm

F Mark



### Fitting

Input Type

Constant Current

Input Current

300mA

Voltage

32V

Power(Watts)

9,6W

IP Rating

IP65

Light Source

LED built in

LED Type

COB

LED Brand

Epistar


Gear

Gear Type


Led Driver

Input Voltage

100-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	7,2-12W
Power Factor	0,9
Constant Current	Yes
300mA	24-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector


#### Illumination Data

Colour Temperature	4000K
Lumen Output	700lm
Light Efficiency	70lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

#### Packing Info

Box Length	14,5cm
Box Width	5,5cm
Box Height	16cm
Box Weight	0,8Kg
Pcs/Carton	20
Barcode	5291889042037
HS Code	9405409900

#### Energy Label

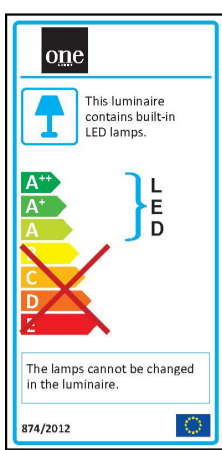

## Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

