

14 Plafo > Outdoor Project LED Plafo Die cast

67384A/AN/W



30W LED slim plafo, IP54, ideal for both indoor and outdoor installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

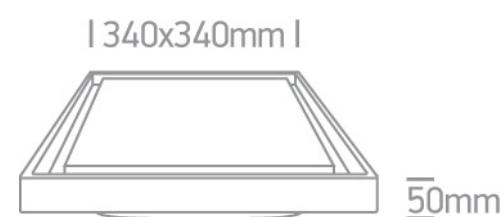

Physical Specification

| | |
|-----------------|------------------------------------|
| Item Group | 14 Plafo |
| Family | Outdoor Project LED Plafo Die cast |
| Order Code | 67384A/AN/W |
| Colour | Anthracite |
| Material | Die Cast |
| Shape | Rectangular |
| Length | 340mm |
| Width | 340mm |
| Height | 50mm |
| Surface Ceiling | Yes |
| Indoor | Yes |
| Outdoor | Yes |

Electrical Characteristics

Gear

Built In

Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

30W

IP Rating

IP54

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

700mA

Voltage

55V

Power(Watts)

19,25W

IP Rating

IP54

Light Source

LED built in

LED Type

SMD 3014

LED Brand

Osram

LED Number

299

F Mark




Gear

Gear Type


Led Driver

Input Voltage

100-240V

| | |
|------------------|---|
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 19,6-30W |
| Power Factor | 0,9 |
| Constant Current | Yes |
| 700mA | 28-43V |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Housing Material | Plastic |
| Output Terminal | Cable |
| Brand | Eaglerise |

Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 3000K |
| Lumen Output | 2500lm |
| Light Efficiency | 83,33lm/W |
| CRI | 80 |
| Illumination Diagram |  |

Packing Info

| | |
|------------|---------------|
| Box Length | 25,5cm |
| Box Width | 25,5cm |
| Box Height | 6,5cm |
| Box Weight | 2.825kg |
| Pcs/Carton | 4 |
| Barcode | 5291889046615 |
| HS Code | 9405409900 |

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

