

21 Industrial &amp; Floodlights&gt;The COB LED Slim Floodlights

**7028E/AN/C**

2x50W COB LED Slim floodlight, IP65.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

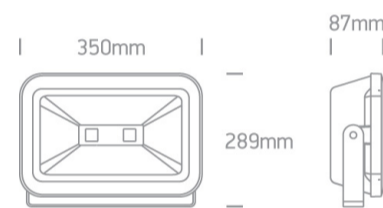

## Physical Specification

Item Group	21 Industrial & Floodlights
Family	The COB LED Slim Floodlights
Order Code	7028E/AN/C
Colour	Anthracite
Material	Die Cast
Shape	Rectangular
Length	350mm
Width	289mm
Height	87mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes

Outdoor

Yes

Pobrano z mamadecor.pl

Adjustable

1 Direction

## Electrical Characteristics

Gear

Built In

### Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

2x50W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

Cable Length

100cm

F Mark



### Fitting

Input Type

Constant Current

Input Current

1500mA

Voltage

2x32V

Power(Watts)

2x48W

IP Rating

IP65

Light Source

LED built in

LED Type

COB

LED Brand

Epistar


LED Number

2


Gear

Gear Type

Led Driver


Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	33-54W
Power Factor	0,9
Constant Current	Yes
1500mA	22-36V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector

#### Illumination Data

Colour Temperature	4000K
Lumen Output	7000lm
Light Efficiency	70lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

#### Packing Info

Box Length	31cm
Box Width	8,8cm
Box Height	35,2cm
Box Weight	5Kg
Pcs/Carton	3
Barcode	5291889042068
HS Code	9405409900

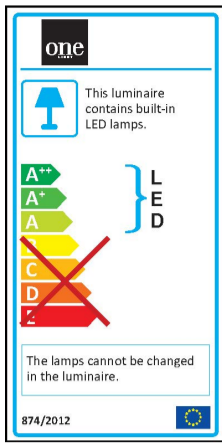

## Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

