

21 Industrial & Floodlights>The Classic LED Floodlights Die cast

7032/AN/C



150W Classic LED floodlight, IP65.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions





Physical Specification

Item Group	21 Industrial & Floodlights
Family	The Classic LED Floodlights Die cast
Order Code	7032/AN/C
Colour	Anthracite
Material	Die Cast
Diffuser Material	Glass
Shape	Rectangular
Length	450mm
Width	260mm
Height	185mm
Surface Ceiling	Yes
Surface Wall	Yes


Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	150W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	4500mA
Voltage	33V
Power(Watts)	148,5W
IP Rating	IP65
Light Source	LED built in
LED Type	COB
LED Brand	Epistar

Gear	
Gear Type	Led Driver
Input Voltage	100-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	121,5-162W
Power Factor	0,95
Constant Current	Yes
Output	4500mA
Voltage Range	27-36V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Meanwell


Illumination Data

Colour Temperature	4000K
Lumen Output	12000lm
Light Efficiency	80lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Weight	8,6Kg
Pcs/Carton	1
Barcode	5291889032731
HS Code	9405409900

Energy Label

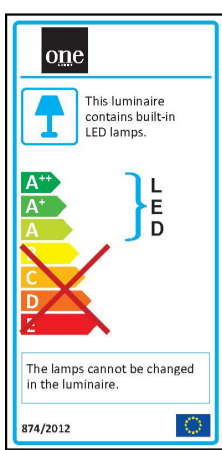

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

