

21 Industrial & Floodlights>The Slim Line LED Floodlights Die cast

## 7040/G/D



30W COB LED Slim floodlight, IP65.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions





### Physical Specification

Item Group	21 Industrial & Floodlights
Family	The Slim Line LED Floodlights Die cast
Order Code	7040/G/D
Colour	Grey
Material	Die Cast
Diffuser Material	Glass
Shape	Rectangular
Length	240mm
Width	280mm
Height	145mm
Surface Ceiling	Yes
Surface Wall	Yes


Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	1 Direction

## Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
Cable Length	100cm
F Mark	

Fitting	
Input Type	Constant Current
Power(Watts)	30W
IP Rating	IP65
Light Source	LED built in
LED Type	COB
LED Brand	Epistar

Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes

60 Hz	Yes
Power(Watts)	30W
Power Factor	0,9
Constant Current	Yes
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector


### Illumination Data

Colour Temperature	6000K
Lumen Output	2100lm
Light Efficiency	70lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

### Packing Info

Box Length	25cm
Box Width	10cm
Box Height	32cm
Box Weight	2,5Kg
Pcs/Carton	10
Barcode	5291889032779
HS Code	9405409900

### Energy Label

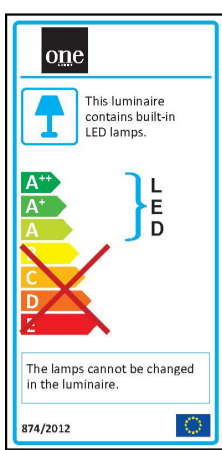

## Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

