


# INSTALLATION MANUAL

## 7040

**ecoLED**


100-240V | 30W | IP65 | Die cast | Adjustable

Complete with LED driver


**one**  
L I G H T

### INTRODUCTION


The LED Flood Light fixture contains a high power LED which is environmentally friendly, energy-saving and the best solution for the replacement of conventional lighting. They are available in warm white and daylight.

### CONSTRUCTION

Extruded aluminium housing, 3mm toughened glass, universal voltage input AC100-240V, IP65 water resistant.

### SPECIFICATIONS

Input voltage	100-240VAC, 50/60HZ
Power consumption	30W
Light source	High Power LED
Beam angle	120°x 60°
Color Temperature	3000/6000K
Operating Humidity	10~90%
Operating Temperature	-40°C ~ 50°C
Projection Distance	6~12m
Max Projected area	15~30m <sup>2</sup>
Mounting Height	2~4m
IP Rating	IP65
Average Life Span	30,000Hrs

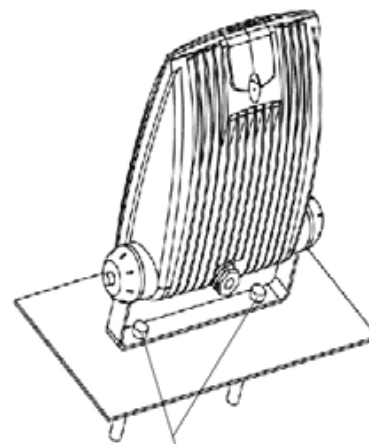

M10 x 80mm (30/50W)

### Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.