

Torsion

Series of interior light fixtures equipped with SMD LEDs, structure in aluminum and metal painted in mat white or with bronze finishing, diffuser of opal white silicone.



01-1798



01-1796

Torsion



01-1794



01-1795



01-1816



01-1798



Torsion



01-1792



01-1790



01-1791

Torsion

Series of interior light fixtures equipped with SMD LEDs, structure in aluminum and metal painted in mat white or with bronze finishing, diffuser of opal white silicone.

Serie de corpuri de iluminat pentru interior echipate cu LED-uri SMD, structură din aluminiu și metal vopsit alb mat sau cu finisaj bronz, dispersor din silicon alb opal.

Serie di apparecchi per interni, equipaggiati con SMD LED, struttura in alluminio e metallo verniciata a polveri bianco opaco o finitura bronz, diffusore in silicone opalino bianco.


Серия светильников для внутреннего освещения, оснащенных светодиодами SMD, структура из алюминия и металла, окрашенных в электростатическом поле в белый матовый цвет или с бронзовой отделкой, рассеиватель из опалового белого силикона.

Beltéri lámpa testek, SMD LED-el szerelve, matt fehér vagy bronz alumínium szerkezet, fehér opál szilikon diszperzór.

Серия от интериорни осветители с SMD LED платка, корпус от алуминий и металл, боядисани в бял или бронз мат, дифузер от бял силикон.

Séria vnútorných svietidiel vybavených LED diódami SMD, konštrukcia z hliníka a kovu lakovaná v matnej bielej alebo s bronzovou povrchovou úpravou, difúzor z opáľového bieleho silikónu.


- art. 01-1789 Mat White 3000K
- art. 01-1790 Bronze 3000K
- art. 01-1884 Mat White 4000K
- art. 01-1885 Bronze 4000K



Led type	SMD LED 2835 240 pcs x 0,10W	
Power	27W	
Input	220V-240V, 50/60Hz	
Color temperature	3000K	4000K
Lumen source	3409 lm	3744 lm
Lumen system	2114 lm	2321 lm
CRI	80	
Dimmable (3 step)	☑	

CE IP20


- art. 01-1791 Mat White 3000K
- art. 01-1792 Bronze 3000K
- art. 01-1886 Mat White 4000K
- art. 01-1887 Bronze 4000K

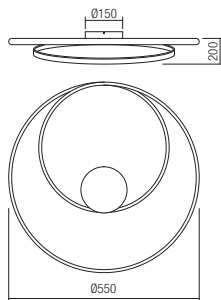

Led type	SMD LED 2835 336 pcs x 0,089W	
Power	29W	
Input	220V-240V, 50/60Hz	
Color temperature	3000K	4000K
Lumen source	3945 lm	4175 lm
Lumen system	2446 lm	2589 lm
CRI	80	
Dimmable (3 step)	☑	

CE IP20


- art. 01-1815 Mat White 3000K
- art. 01-1816 Bronze 3000K
- art. 01-1898 Mat White 4000K
- art. 01-1899 Bronze 4000K



Led type	SMD LED 2835 132 pcs x 0,083W	
Power	10W	
Input	220V-240V, 50/60Hz	
Color temperature	3000K	4000K
Lumen source	1420 lm	1496 lm
Lumen system	880 lm	928 lm
CRI	80	
Not dimmable	☒	

CE IP20


- art. 01-1797 Mat White 3000K
- art. 01-1798 Bronze 3000K
- art. 01-1896 Mat White 4000K
- art. 01-1897 Bronze 4000K

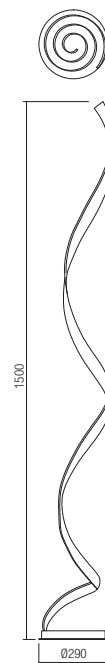

Led type	SMD LED 2835 288 pcs x 0,083W	
Power	25W	
Input	220V-240V, 50/60Hz	
Color temperature	3000K	4000K
Lumen source	3189 lm	3397 lm
Lumen system	1977 lm	2106 lm
CRI	80	
Dimmable	☑	

CE IP20


- art. 01-1793 Mat White 3000K
- art. 01-1794 Bronze 3000K
- art. 01-1888 Mat White 4000K
- art. 01-1889 Bronze 4000K

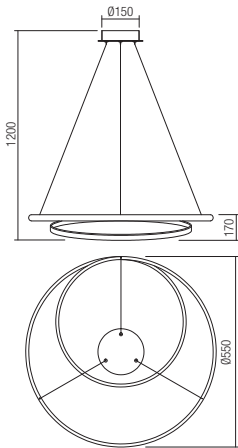

Led type	SMD LED 2835 336 pcs x 0,089W	
Power	29W	
Input	220V-240V, 50/60Hz	
Color temperature	3000K	4000K
Lumen source	3945 lm	4175 lm
Lumen system	2446 lm	2589 lm
CRI	80	
Dimmable (3 step)	☉	

CE IP20


- art. 01-1795 Mat White 3000K
- art. 01-1796 Bronze 3000K
- art. 01-1890 Mat White 4000K
- art. 01-1891 Bronze 4000K

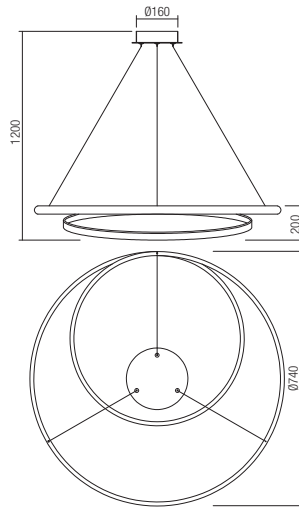

Led type	SMD LED 2835 456 pcs x 0,087W	
Power	35W	
Input	220V-240V, 50/60Hz	
Color temperature	3000K	4000K
Lumen source	4678 lm	5009 lm
Lumen system	2900 lm	3106 lm
CRI	80	
Dimmable (3 step)	☉	

CE IP20


- art. 01-1880 Mat White 3000K
- art. 01-1881 Bronze 3000K
- art. 01-1892 Mat White 4000K
- art. 01-1893 Bronze 4000K

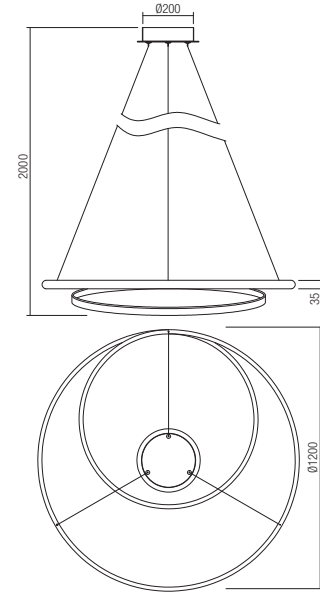

Led type	SMD LED 2835 768 pcs x 0,09W	
Power	76W	
Input	220V-240V, 50/60Hz	
Color temperature	3000K	4000K
Lumen source	9323 lm	9767 lm
Lumen system	5780 lm	6056 lm
CRI	80	
Dimmable (3 step)	☉	

CE IP20

- art. 01-1882 Mat White 3000K
- art. 01-1883 Bronze 3000K
- art. 01-1894 Mat White 4000K
- art. 01-1895 Bronze 4000K

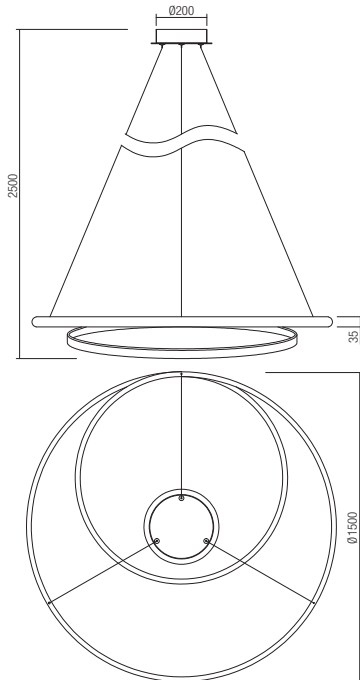

Led type	SMD LED 2835 1008 pcs x 0,09W	
Power	86W	
Input	220V-240V, 50/60Hz	
Color temperature	3000K	4000K
Lumen source	11041 lm	11593 lm
Lumen system	6845 lm	7188 lm
CRI	80	
Dimmable (3 step)	☉	

CE IP20

