

LAURA ASHLEY**Installation & Operation Guide****Selbourne Nickel**

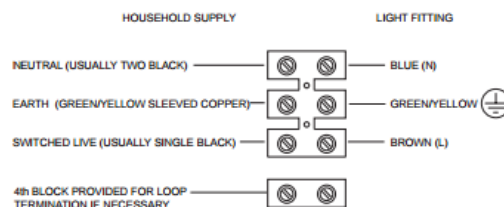
3650354

WARNINGS

This unit has been designed and built according to international safety standards. These warnings are given for safety reasons and must be carefully followed.

Please read these instructions carefully and retain this document.

- This product is class 1 and must be earthed.
- It is recommended that this fitting is installed by a qualified Electrician.
- This fitting should be fitted in accordance with IEE Regulations and the building Regulations.
- To prevent electrocution, switch off at the mains supply before installing or maintaining this fitting.
- Ensure other persons cannot restore the electricity supply without your knowledge.
- If replacing an existing fitting, make a note of the connections.
- Always use the correct type and wattage bulb. Never exceed the wattage stated.
- When changing a bulb, always switch off at the mains and allow the bulb to cool down before handling and dispose of the used bulbs carefully.
- The bulb and the surrounding parts can become extremely hot during use.
- Laura Ashley work hard with some of the best suppliers available to be sure that the quality of our product does not disappoint. Please inspect the unit before installation and speak to customer services if there is an issue. Issues are more difficult to rectify once the unit is installed.
- Please clean using a damp cloth, do not use abrasive cleaners or multi-purpose sprays, they may affect the finish.

Installation

- Ensure the house electricity is switched off at the fuse board.
- The weight of the fitting must be supported by the suspension chain and not the flexible cable.
- Ensure that the bracket (supplied) is fixed to a wooden joist in the ceiling using screws (supplied) or use a suitable fixing to the ceiling which will support the weight of the fitting.
- Adjust the chain to the required length, ensure the cable is longer than the chain, feed the flexible cable through the chain links and into the ceiling cup. Ensure that no strain is placed on the cable.
- Connect cables or terminals as shown
- Check wires are tight in the terminal block, and no loose strands are left out. Cover with insulating tape.
- Push up ceiling cup and secure.
- Fit the bulb type/wattage as indicated on the luminaires. THE WATTAGE INDICATED MUST NOT BE EXCEEDED.
- Switch on the electricity supply at the fuse board.
- Please refer to the website for more information.

Specification

Power Source	220~ 240 V - 50/60 Hz
Class	Class I \perp
Recommended Bulb	Shape – Candle 300 lm
	LED 4-8W
	CFL 8-9W
	Halogen 28W
Suitable for Use with	No
Dimmer	
Weight	3.1kgs

**Customer Services**

Any problems call our customer services team on 03332 008 009 (Mon-Friday 0800 – 1800) or write to: Laura Ashley Customer Services, PO Box 19, Newtown, Powys, SY16 1DZ

Calls charged at national rate

LAURA ASHLEY

27 Bagleys Lane, Fulham
London SW6 2QA

Please refer to the website for more information
www.lauraashley.com

