

13 Wall & Ceiling LED>Outdoor Slim Range Up & down beam

67376A/W/W

2x6W, IP54, SMD 2835, Outdoor Slim Range Up & down beam.


Complies with standard EN60598-1 and any other specific standards.



Downloads



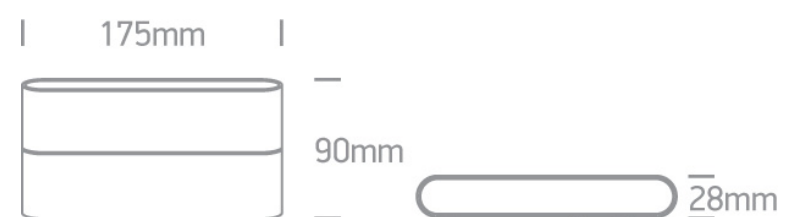

Dimensions



Physical Specification


| | |
|--------------|-----------------------------------|
| Item Group | 13 Wall & Ceiling LED |
| Family | Outdoor Slim Range Up & down beam |
| Order Code | 67376A/W/W |
| Colour | White |
| Material | Die Cast |
| Shape | Rectangular |
| Length | 175mm |
| Width | 90mm |
| Height | 28mm |
| Surface Wall | Yes |
| Indoor | Yes |
| Outdoor | Yes |

Electrical Characteristics


| Gear | Built In |
|------------------|---|
| Fitting + Driver | |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class |  |
| Power(Watts) | 2x6W |
| IP Rating | IP54 |
| Light Source | LED built in |
| Dimmable | No |
| F Mark |  |

| Fitting | |
|---------------|------------------|
| Input Type | Constant Current |
| Input Current | 350mA |
| Voltage | 16V |
| Power(Watts) | 5,6W |
| IP Rating | IP54 |
| Light Source | LED built in |
| LED Type | SMD 2835 |
| LED Brand | Edison |

| Gear | |
|---------------|------------|
| Gear Type | Led Driver |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 2,9-6,1W |
| Power Factor | 0,5 |

| | |
|------------------|---|
| Constant Current | Yes |
| 350mA | 8,5-17,5V |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Ambient Temp | 50°C |
| Operating Temp | 75°C |
| Housing Material | Plastic |
| Output Terminal | Cable |
| Brand | Eaglerise |

Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 3000K |
| Lumen Output | 2x420lm |
| Light Efficiency | 70lm/W |
| CRI | 80 |
| Illumination Diagram |  |

Packing Info

| | |
|------------|---------------|
| Box Weight | 0.625kg |
| Pcs/Carton | 12 |
| Barcode | 5291889043645 |
| HS Code | 9405409900 |

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

