

06 Downlights Fixed LED>The IP54 Bathroom Downlights

10118B/W/W



18W LED recessed downlight, IP54. Suitable for bathroom installations.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

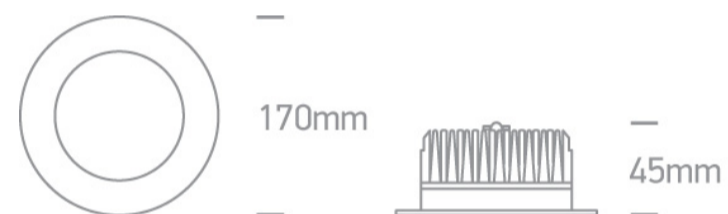

Gallery



Physical Specification

Item Group

06 Downlights Fixed LED

Family

The IP54 Bathroom Downlights

Order Code

10118B/W/W

Colour

White

Material

Die Cast

Diffuser Material



Plastic


Shape

Circular

Height	45mm
Diameter	170mm
Cutout Hole Diameter	140mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	18W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	34V
Safety Class	
Power(Watts)	17W
IP Rating	IP54
Light Source	LED built in

LED Type

SMD 2835

Pobrano z mamadecor.pl

LED Brand

Epistar

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

13,5-20W

Power Factor

0,9

Constant Current

Yes

500mA

27-40V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

45°C

Operating Temp

80°C

Housing Material

Plastic

Output Terminal

Cable

Brand

0

Protection

Short Circuit and Overload

Illumination Data

Colour Temperature

3000K

Lumen Output

1300lm

Light Efficiency

72,22lm/W

CRI

80

Beam Angle

90°

Illumination Diagram



Box Length	18,5cm
Box Width	18,5cm
Box Height	9cm
Pcs/Carton	30
Barcode	5291889057703
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Average Lifetime	40000hrs
Weee Directive	Yes

switch to
one light!

one
LIGHT

