


Product Datasheet

www.1-light.eu

13 Wall & Ceiling LED>The COB LED Indoor Cylinders Aluminium

12115LA/W/W

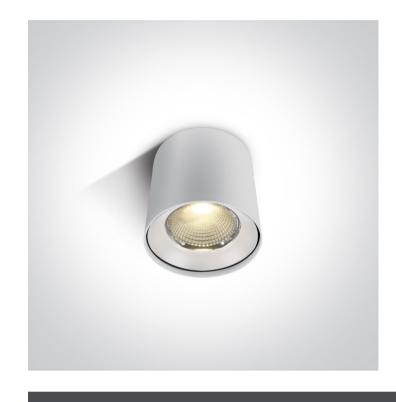

15W COB LED ceiling downlight, ideal for residential and commercial illumination.

Complete with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions



Physical Specification

Item Group	13 Wall & Ceiling LED
Family	The COB LED Indoor Cylinders Aluminium
Order Code	12115LA/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	115mm
Diameter	118mm
Surface Wall	Yes
Indoor	Yes
Adjustable	No

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	350mA
Voltage	42V
Power(Watts)	14,7W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Philips
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	9,5-14W
Power Factor	0,9

Constant Current	Yes Pobrano z mamadecor.pl
350mA	27-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	LIFUD
Illumination Data	
Colour Temperature	3000K
Lumen Output	1300lm
Light Efficiency	86,67lm/W
CRI	80
Beam Angle	50°
Illumination Diagram	
Packing Info	
Box Weight	0.552kg
Pcs/Carton	36
Barcode	5291889044901
HS Code	9405409900

Certification & Warranty

Yes

Weee Directive

switch to one light!

