

07 Downlights Adjustable LED>The Box Type Shop Range

51125/G/C



25W COB LED Recessed adjustable downlight, shop range, IP20.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

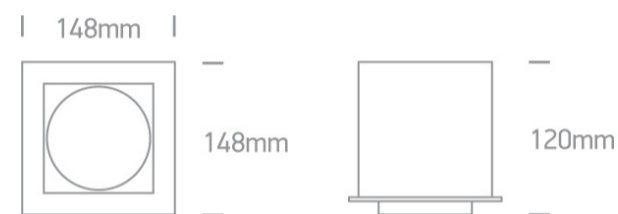

Gallery



Physical Specification

Item Group

07 Downlights Adjustable LED

Family

The Box Type Shop Range

Order Code

51125/G/C

Colour

Grey

Material

Die Cast

Shape



Rectangular


Length

148mm

Width	148mm
Height	120mm
Cutout Hole Width	130mm
Cutout Hole Length	130mm
Recessed Ceiling	Yes
Depth Required	160mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	25W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	600mA
Voltage	40V
Safety Class	
Power(Watts)	24W
IP Rating	IP20
Light Source	LED built in

LED Type

COB

Pobrano z mamadecor.pl

LED Brand

Cree

Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

16,2-25,2W

Power Factor

0,9

Constant Current

Yes

600mA

27-42V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

70°C

Operating Temp

40°C

Housing Material

Plastic

Brand

Lifud

Illumination Data

Colour Temperature

4000K

Lumen Output

1750lm

Light Efficiency

64,47lm/W

CRI

80

Beam Angle

38°

Illumination Diagram



Packing Info

Box Length

18cm

Box Width	18cm
Box Height	15cm
Box Weight	1,08kg
Pcs/Carton	12
Barcode	5291889035541
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT

