

06 Downlights Fixed LED>The SMD Dark Light Range

50122D/W/W

22W Dark Light LED Downlight .

Supplied with 500mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

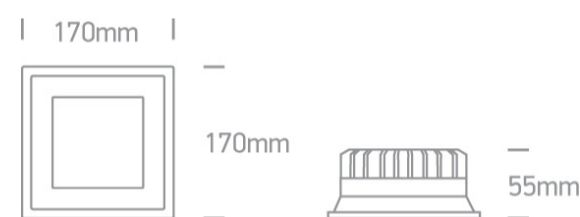




Physical Specification

Item Group	06 Downlights Fixed LED
Family	The SMD Dark Light Range
Order Code	50122D/W/W
Colour	White
Material	Die Cast
Shape	Rectangular
Length	170mm
Width	170mm
Height	55mm
Cutout Hole Width	160mm
Cutout Hole Length	160mm
Recessed Ceiling	Yes


Depth Required	75mm
Indoor	Yes
Adjustable	No

Electrical Characteristics


Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	22W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	40V
Safety Class	
Power(Watts)	20W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

Gear	
Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	12,5-20W
Power Factor	0,9
Constant Current	Yes
500mA	25-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	-30? ~ +50?
Housing Material	Plastic
Brand	Lifud

Illumination Data

Colour Temperature	3000K
Lumen Output	1870lm
Light Efficiency	85lm/W
CRI	80
Beam Angle	100°
Illumination Diagram	
Dark Light	Yes

Packing Info

Pcs/Carton	20
Barcode	5291889060796
HS Code	9405409900

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

