

## 14 Plafo>The LED Panel Plafo Square

## 62130AF/W/W



30W LED slim plafo light, IP40, suitable for residential and commercial application.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



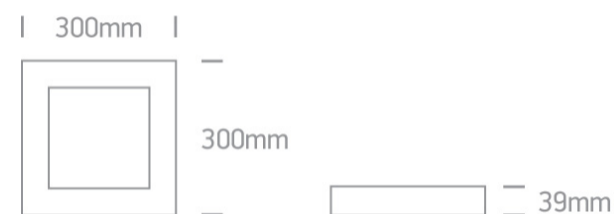

### Dimensions





### Physical Specification


Item Group	14 Plafo
Family	The LED Panel Plafo Square
Order Code	62130AF/W/W
Colour	White
Material	Die Cast
Shape	Rectangular
Length	300mm
Width	300mm
Height	39mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

## Electrical Characteristics


Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP40
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1000mA
Voltage	28V
Safety Class	
Power(Watts)	28W
IP Rating	IP40
Light Source	LED built in
LED Type	SMD 4014
LED Brand	Zhaochi
F Mark	

Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes

Power(Watts)	21-28W
Power Factor	0,9
Constant Current	Yes
700mA	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	KEGU

### Illumination Data

Colour Temperature	3000K
Lumen Output	2550lm
Light Efficiency	72,46lm/W
CRI	80
Illumination Diagram	

### Packing Info

Box Length	32cm
Box Width	31,5cm
Box Height	4,5cm
Box Weight	1.870kg
Pcs/Carton	10
Barcode	5291889035923
HS Code	9405413990

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

