

## 14 Plafo>The LED Slim Plafo Range Round

## 67368/W/W



18W LED slim plafo, IP54, ideal for both indoor and outdoor installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

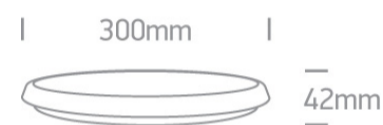

### Physical Specification

Item Group	14 Plafo
Family	The LED Slim Plafo Range Round
Order Code	67368/W/W
Colour	White
Material	PC
Shape	Circular
Height	42mm
Diameter	300mm
Surface Ceiling	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No

## Electrical Characteristics

Gear

Built In

## Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

18W

IP Rating

IP54

Light Source

LED built in

Dimmable

No

F Mark



## Fitting

Input Type

Constant Current

Input Current

225mA

Voltage

80V

Power(Watts)

14W

IP Rating

IP54

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Epistar

F Mark



## Gear

Gear Type


Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz	Yes
Power(Watts)	18W
Power Factor	0,9
Constant Current	Yes
Output	225mA
Voltage Range	80V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable

#### Illumination Data

Colour Temperature	3000K
Lumen Output	1350lm
Light Efficiency	75lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

#### Packing Info

Box Length	31cm
Box Width	31cm
Box Height	5cm
Box Weight	1.090kg
Pcs/Carton	10
Barcode	5291889043065
HS Code	9405114090

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

