

19 Wall Recessed & Inground>The COB Honeycomb Range

69052A/W



13W COB LED inground with honeycomb, IP67.

Requires 350mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery



Must be ordered separately



89015



89015T


Physical Specification

Item Group	19 Wall Recessed & Inground
Family	The COB Honeycomb Range
Order Code	69052A/W
Colour	Aluminium
Material	Aluminium
Diffuser Material	Glass
Shape	Circular
Height	80mm
Diameter	92mm
Cutout Hole Diameter	75mm
Inground	Yes
Depth Required	140mm + 300mm drainage
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8


Electrical Characteristics

Fitting

Input Type	Constant Current
Input Current	350mA
Voltage	37V
Safety Class	III

Power(Watts)	13W
IP Rating	IP67
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux
Cable Length	200cm
F Mark	


Illumination Data

Colour Temperature	3000K
Lumen Output	1000lm
Light Efficiency	76,92lm/W
CRI	80
Beam Angle	36°
Illumination Diagram	

Packing Info

Box Length	11,5cm
Box Width	10,5cm
Box Height	13cm
Pcs/Carton	24
Barcode	5291889056997
HS Code	9405409900

Energy Label

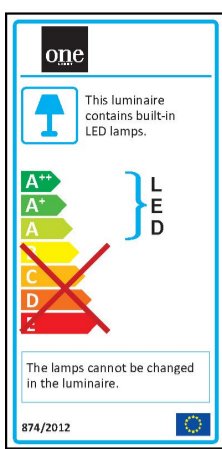

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

